

Product Information Sheet			
COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labeling of light sources			
Supplier's name or trade mark: GOVEE MOMENTS (DE) HANDEL GmbH			
Supplier's address: YONG LIU, Zum Linnegraben 2065933, Frankfurt am Main, Germany, DE			
Model identifier: H6072			
Type of light source:			
Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	230VAC, 50Hz, E27		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tunable light source:	Yes	Envelope:	-
High luminance light source:	No	Dimmable:	Yes
Anti-glare shield:	No	Dimmable:	Yes
Product parameters			
Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	24	Energy efficiency class	F
Useful luminous flux (lm), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 138 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2200...6500
On-mode power (P <sub>on</sub> ), expressed in W	34,0	Standby power (P <sub>stb</sub> ), expressed in W and rounded to the second decimal	0,50
Networked standby power (P <sub>stb</sub> ) for CLS, expressed in W and rounded to the second decimal	0,50	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	1 200	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	20	
	Depth	12	


Page 1/3

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(H)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,504 0,415
Parameters for LED and OLED light sources:			
RG colour rendering index value	34	Survival factor	1,00
the lumen maintenance factor	0,94		
Parameters for LED and OLED mains light sources:			
displacement factor (cos φ1)	0,92	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	- <sup>(H)</sup>	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(H) - not applicable;

(B) - not applicable;

Page 2/3

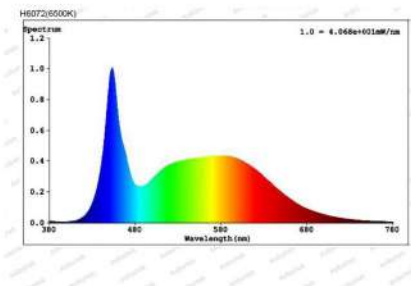

Page 3/3