

# Choetech HUB-M52 15in1 USB C Multiport Adapter User Manual




## Contents


- 1 [Product Diagram](#)
- 2 [Specifications](#)
- 3 [Connection](#)
- 4 [Notice](#)
- 5 [Frequently Asked Questions](#)
- 6 [Why is there no video output?](#)
- 7 [Why there are not five video outputs on Windows?](#)
- 8 [Why there is no audio output from HDMI port?](#)
- 9 [Can I connect my Apple SuperDrive to the dock?](#)
- 10 [My docking station is not charging my laptop.](#)
  - 10.1 [Warranty Conditions](#)
  - 10.2 [EU Declaration of Conformity](#)
  - 10.3 [WEEE](#)
  - 10.4 [Documents / Resources](#)
    - 10.4.1 [References](#)
  - 10.5 [Related Posts](#)

## Product Diagram

- 1. PD3.0
- 2. USB-C input (host)
- 3. 3.5mm audio & mic
- 4. USB-C data
- 5. USB-A 3.1
- 6. USB-A 3.0
- 7. USB-A 2.0

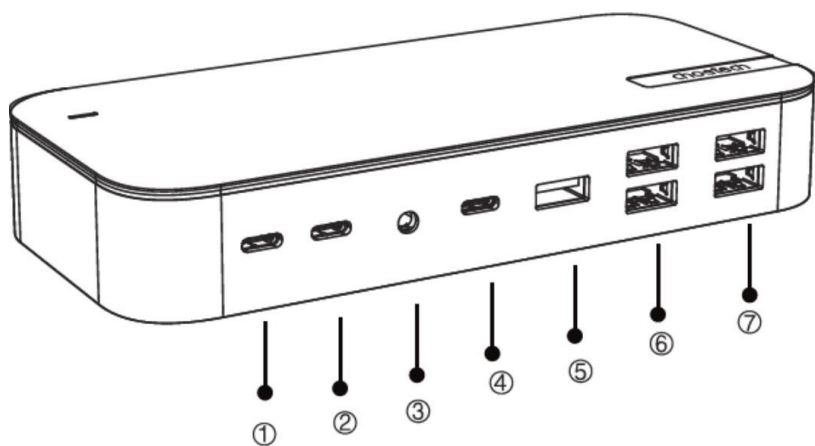

1. LED indicator
2. VGA
3. HDMI 1
4. HDMI 2
5. DP
6. RJ45
7. SD & MicroSD card reader

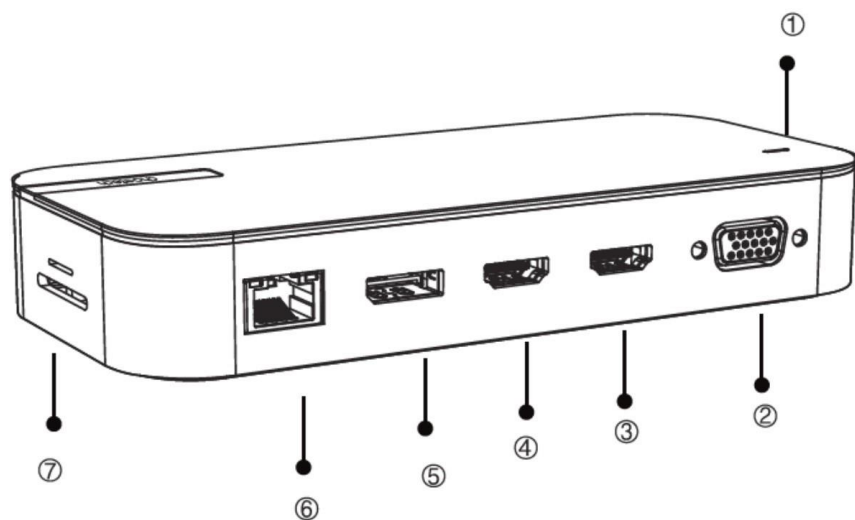


## Specifications

Interfaces	1× PD3.0, 1× USB-C (host), 1× 3.5mm audio & mic, 1× USB-C data, 1× USB-A 3.1, 2× USB-A 3.0, 1× VGA, 2× HDMI, 1× DP, 1× RJ45, 1× SD & TF Card reader
1× PD3.0	PD3.0 100W (Max.)
1× USB-C input (host)	Connect to host
1× 3.5mm audio & microphone	Audio and microphone

1× USB-C 3.1 Gen 2	Up to 10 Gbps, 5V/1.5A (Max.)
1× USB-A 3.1	10 Gbps, 5V/1.5A @7.5W
1× USB-A 3.0	5 Gbps, 5V/0.9A @4.5W
2× USB-A 2.0	480Mbps, 5V/0.5A @2.5W
1× VGA	Resolution up to 1080p/60Hz
HDMI 1	4K 60Hz/2840×2160 (work separately while source is DP1.4) 4K 30Hz/3840×2160 (work separately while source is DP1.2)
HDMI 2	4K@30Hz/3840×2160
1× DP	4K 60Hz/2840×2160 (work separately while source is DP1.4) 4K 30Hz/3840×2160 (work separately while source is DP1.2)
1× RJ45 Gigabit Ethernet	1000Mbps
1× SD & MicroSD card reader	Read: 50-104 MB/s Write: 30-80 MB/s (Data transfer rates are subject to the speed of the memory card, itself and your computer's USB ports.)

## Connection

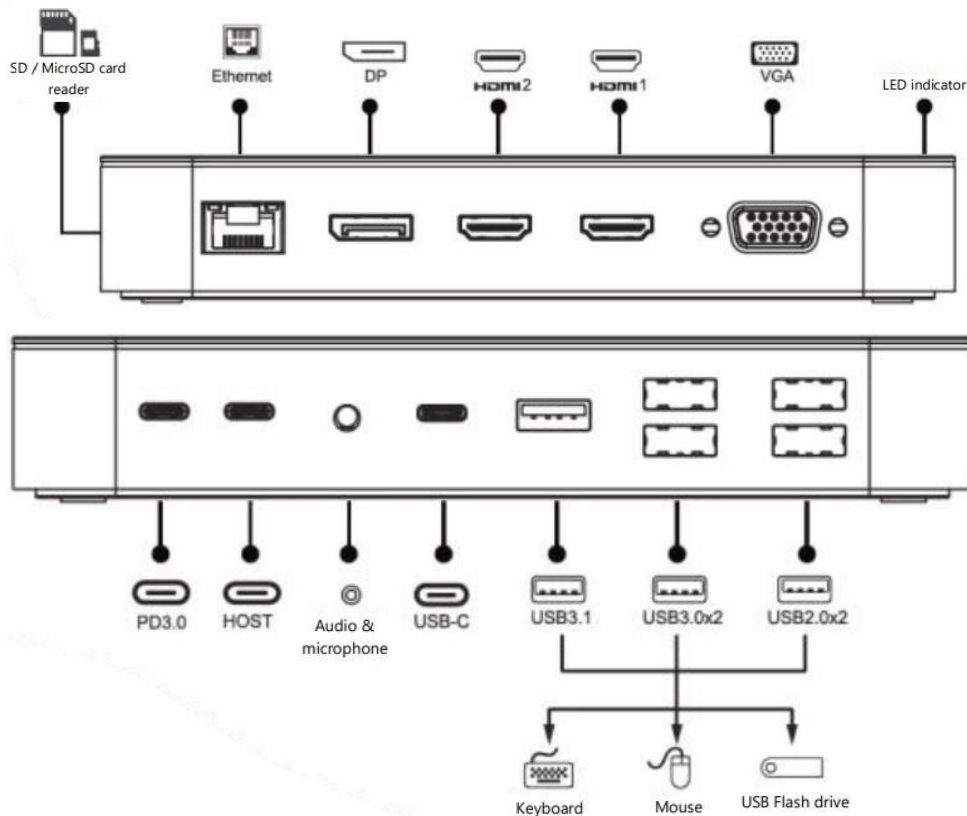

## Notice

- Please make sure the USB-C port of your smartphone/tablet/laptop supports the DP feature before purchase, or your PC will not output any contents.
- 
- 4K @60Hz video display, please make sure your PC supports DisplayPort (DP) V1.4 (HBR3). Please update MacOS of your MacBook to at least Catalina (10.15.1) for better compatibility.

## Frequently Asked Questions

---

### Why is there no video output?

Make sure your host supports DisplayPort Alternate Mode (Alt Mode) video output functionality. Use the standard HDMI/DP cable. Check if the cables are well connected.

---

### Why there are not five video outputs on Windows?

Laptops with a discrete graphics card (while source is DP1.4): Docking station supports up to five video outputs. Laptops with an integrated graphics card (while source is DP1.2): Docking station supports up to three video outputs. Laptops with an integrated graphics card (while source is DP1.2): Docking station supports up to four video outputs. Please make sure to select the correct input source for your HDMI and DP monitor.

---

### Why there is no audio output from HDMI port?

Please make sure that there is an audio output function on the monitor. Please set the external monitor as default audio output device.

### Can I connect my Apple SuperDrive to the dock?

No, some devices such as Apple SuperDrive look for Apple-specific signalling and will not work when connected through any USB hub.

---

### My docking station is not charging my laptop.

Please check the specifications of your laptop and identify which port has PD charging functionality if multiple USB-C ports are available. Verify if your host system supports PD over USB-C. Please note that some old models of computers have USB-C port, but do not support charging, only can be powered by its original power adapter.

## Warranty Conditions

A new product purchased in the Alza.cz sales network is guaranteed for 2 years. If you need repair or other services during the warranty period, contact the product seller directly, you must provide the original proof of purchase with the date of purchase.

**The following are considered to be a conflict with the warranty conditions, for which the claimed claim may not be recognized:**

- Using the product for any purpose other than that for which the product is intended or failing to follow the instructions for maintenance, operation, and service of the product.
- Damage to the product by a natural disaster, the intervention of an unauthorized person or mechanically through the fault of the buyer (e.g., during transport, cleaning by inappropriate means, etc.).
- Natural wear and aging of consumables or components during use (such as batteries, etc.).

Exposure to adverse external influences, such as sunlight and other radiation or electromagnetic fields, fluid intrusion, object intrusion, mains overvoltage, electrostatic discharge voltage (including lightning), faulty supply or input voltage and inappropriate polarity of this voltage, chemical processes such as used power supplies, etc.

- If anyone has made modifications, modifications, alterations to the design or adaptation to change or extend the functions of the product compared to the purchased design or use of non-original components.

#### **EU Declaration of Conformity**



This equipment is in compliance with the essential requirements and other relevant provisions of EU directives.

#### **WEEE**



This product must not be disposed of as normal household waste in accordance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE – 2012/19 / EU). Instead, it shall be returned to the place of purchase or handed over to a public collection point for the recyclable waste. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. Contact your local authority or the nearest collection point for further details. Improper disposal of this type of waste may result in fines in accordance with national regulations.

# choetech

---